



## DOUBLE ARTICULATED TELESCOPIC BOOM

Equipped with A-shaped front outriggers and vertical in-shape rear outriggers, TB240 is a versatile machine ready for any use. Thanks to its double articulation any obstacle is easy to climb over.


Precise electro-hydraulic controls on basket, allow for smooth, safe and comfortable lift operations.

## Standard features

- Truck engine on/off switch on basket
- 230 V electric socket on basket
- 12V electric socket on basket
- Air-water pipe 200 Bar available on basket
- Wired Remote Control
- Hour counter



## FOCUS ON DETAILS

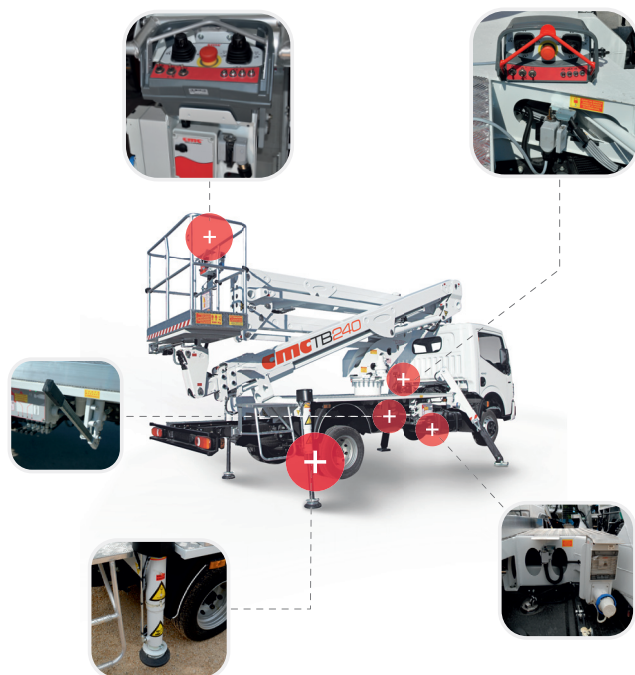

## PERFORMANCE

Max. working height	23,8m
Max. horizontal outreach	11,3m
Max. basket capacity	200 Kg
Basket dimensions	1,4x0,6x1,1 m
Basket rotation	±90° (180° total)
Turret rotation	±360° (720° total)
Stabilization	Front "X shaped, rear in shape
Controls	Electro-hydraulic



## MINIMUM TRUCK SPECIFICATIONS

Truck GVW	3,5 t
Truck min. wheelbase	3400 mm



## MAX LOAD

200 KG/441 LB

80 KG/176 LB

